


POWER

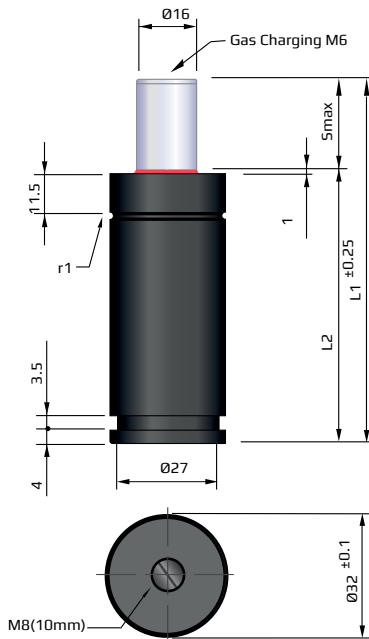


Information


Max. Fülldruck Max. Filling Pressure	150 bar
Min. Fülldruck Min. Filling Pressure	25 bar
Instandhaltungsset Maintenance Kit	NT1.K3-B
Max. Kolbengeschwindigkeit Max. Piston Working Speed	1 m/s

Typ Type	Hub Stroke max.	L1	L2	F1 Anfangskraft Initial Force (daN)	F2 Endkraft Final Force (daN)	P Fülldruck Filling Pressure (bar)
NT1.00300.010	10	70	60	300 (±5%)	355	150
NT1.00300.013	13	75,4	62,7	300 (±5%)	365	150
NT1.00300.016	16	82	66	300 (±5%)	375	150
NT1.00300.025	25	100	75	300 (±5%)	390	150
NT1.00300.038	38	126	88	300 (±5%)	405	150
NT1.00300.050	50	150	100	300 (±5%)	415	150
NT1.00300.063	63	177	113	300 (±5%)	420	150
NT1.00300.080	80	210	130	300 (±5%)	425	150

Verhältnis max. Hubzahl / Hublänge  
Max. stroke rate

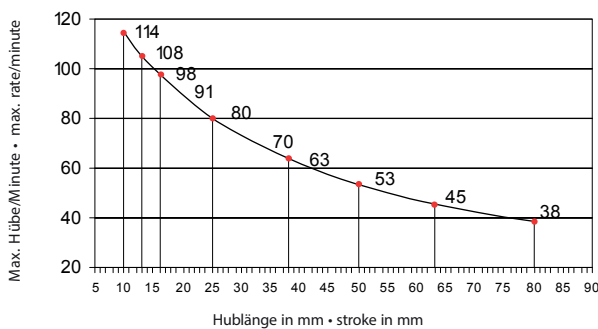

Montagebeispiel • Assembly Example

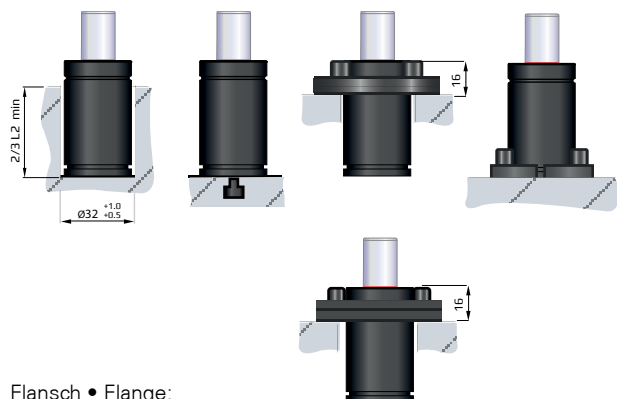

Flansch • Flange:  
NTFR.32 / NTFS.32 / NTFB.32