


Information


Max. Fülldruck Max. Filling Pressure	175 bar
Min. Fülldruck Min. Filling Pressure	35 bar
Instandhaltungsset Maintenance Kit	NT10.K3-B
Max. Kolbengeschwindigkeit Max. Piston Working Speed	20 m/min

Typ Type	Hub Stroke max.	L1	L2	F1 Anfangskraft Initial Force (daN)	F2 Endkraft Final Force (daN)	P Fülldruck Filling Pressure (bar)
NT10.00850.012	12	74	62	850 (±5%)	1255	175
NT10.00850.025	25	100	75	850 (±5%)	1405	175
NT10.00850.038	38	130	92	850 (±5%)	1415	175
NT10.00850.050	50	155	105	850 (±5%)	1455	175
NT10.00850.063	63	185	122	850 (±5%)	1450	175
NT10.00850.080	80	225	145	850 (±5%)	1440	175

Verhältnis max. Hubzahl / Hublänge  
Max. stroke rate

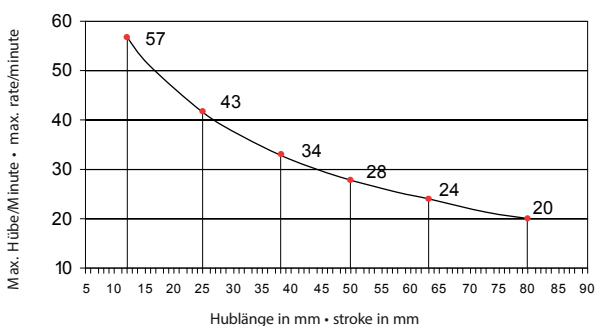

Montagebeispiel • Assembly Example

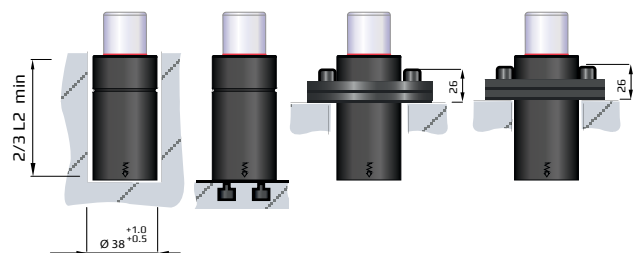

Flansch • Flange:  
NTFR.38 / NTFS.38