


Information

Max. Fülldruck Max. Filling Pressure	150 bar
Min. Fülldruck Min. Filling Pressure	50 bar
Instandhaltungsset Maintenance Kit	NT5.K3-B
Max. Kolbengeschwindigkeit Max. Piston Working Speed	20 m/min

Typ Type	Hub Stroke max.	L1	L2	F1 Anfangskraft Initial Force (daN)	F2 Endkraft Final Force (daN)	P Fülldruck Filling Pressure (bar)
NT5.00750.006	6	63	57	750 (±5%)	1510	150
NT5.00750.010B	10	75	65	750 (±5%)	1595	150
NT5.00750.010	10	80	70	750 (±5%)	1280	150
NT5.00750.015B	15	93	78	750 (±5%)	1480	150
NT5.00750.015	15	100	85	750 (±5%)	1250	150
NT5.00750.025B	25	120	95	750 (±5%)	1445	150
NT5.00750.025	25	135	110	750 (±5%)	1185	150
NT5.00750.032	32	140	108	750 (±5%)	1145	150
NT5.00750.040	40	165	125	750 (±5%)	1180	150
NT5.00750.050	50	195	145	750 (±5%)	1220	150

Verhältnis max. Hubzahl / Hublänge
Max. stroke rate

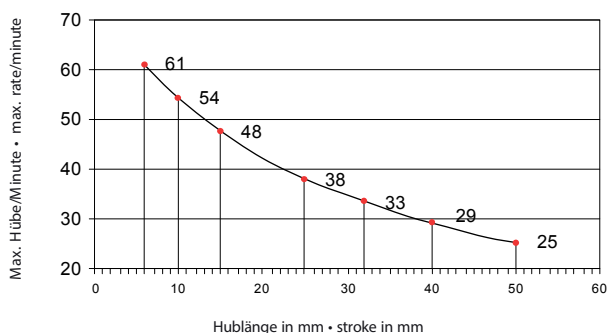

Montagebeispiel • Assembly Example

