



Information	
Max. Fülldruck Max. Filling Pressure	150 bar
Min. Fülldruck Min. Filling Pressure	35 bar
Instandhaltungsset Maintenance Kit	NT8.K3-B
Max. Kolbengeschwindigkeit Max. Piston Working Speed	1,6 m/s

Typ Type	Hub Stroke max.	L1	L2	F1 Anfangskraft Initial Force (daN)	F2 Endkraft Final Force (daN)	P Fülldruck Filling Pressure (bar)
NT8.00740.013	13	58	45	740 (±5%)	1235	150
NT8.00740.016	16	64	48	740 (±5%)	1235	150
NT8.00740.019	19	70	51	740 (±5%)	1240	150
NT8.00740.025	25	82	57	740 (±5%)	1245	150
NT8.00740.032	32	96	64	740 (±5%)	1245	150
NT8.00740.038	38	108	70	740 (±5%)	1250	150
NT8.00740.050	50	132	82	740 (±5%)	1250	150
NT8.00740.063	63	158	95	740 (±5%)	1250	150
NT8.00740.075	75	182	107	740 (±5%)	1250	150
NT8.00740.080	80	192	112	740 (±5%)	1250	150
NT8.00740.100	100	232	132	740 (±5%)	1250	150
NT8.00740.125	125	282	157	740 (±5%)	1250	150

Verhältnis max. Hubzahl / Hublänge  
Max. stroke rate

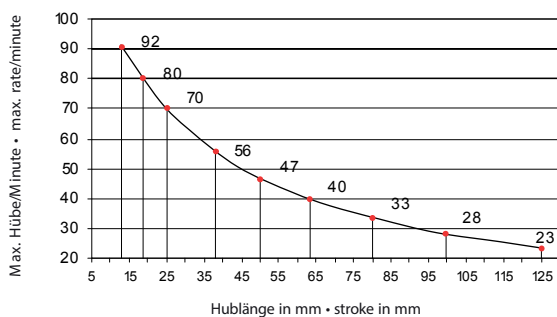

Montagebeispiel • Assembly Example

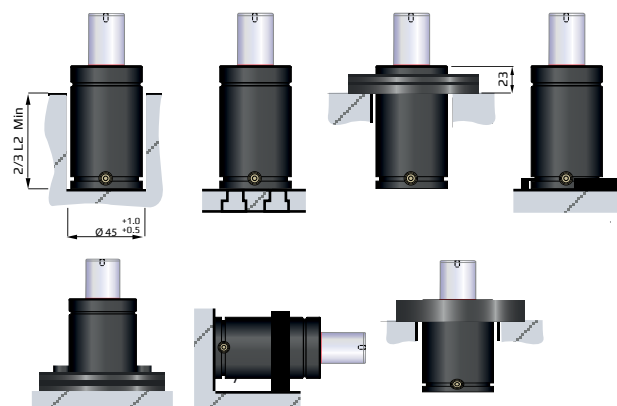

Flansch • Flange:  
NTFR.45 / NTFS.45 / NTFB.45 / NTP.45 / NTFL.45